



High-frequency transformer

EFD30 Series

Parameters/Dimensions:

EFD30 Type 1

Information:




Shape:EFD30

1 Power:68W

2 Mounting Orientation: Horizontal

3 Size: 33 (W) * 34(L) * 20(H)

4 Effective Ae (mm2): 69.0

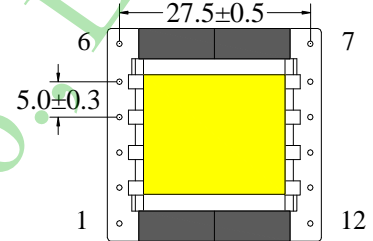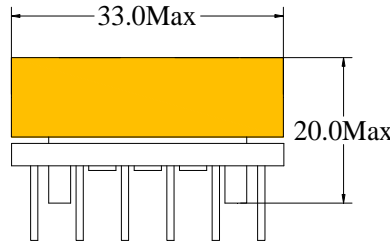

EFD30 Type 2

Information:




Shape:EFD30

1 Power:68W

2 Mounting Orientation: Horizontal

3 Size: 33 (W) * 34(L) * 18(H)

4 Effective Ae (mm2): 69.0

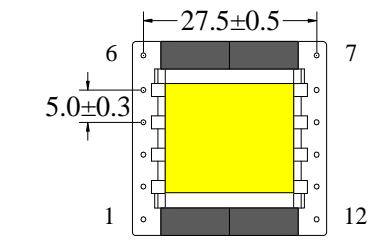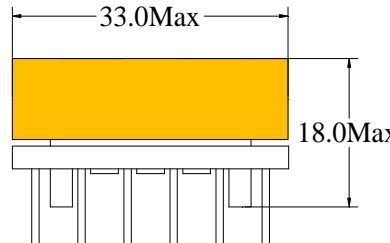

EFD30 Type 3

Information:




Shape:EFD30

1 Power:68W

2 Mounting Orientation: Horizontal

3 Size: 33 (W) * 35(L) * 15(H)

4 Effective Ae (mm2): 69.0

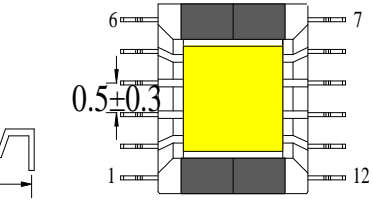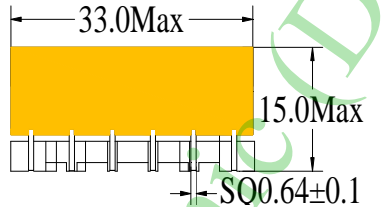

Note:

Bobbin type listed in the traditional style, transformer design parameters to customer needs or to inject prevail.

EFD series high-frequency transformer features:

Has a low thermal resistance, low attenuation, power, frequency of use of the advantages of wide bench. Finished light weight, reasonable structure, easy surface mount.

Uses:

Widely used in small and large power transformers, such as precision instruments, power modules, computer terminal output.